


INDICATOR SIGNAL LIGHTS

mounting hole 22 mm

SUS-95
SUS-95.L

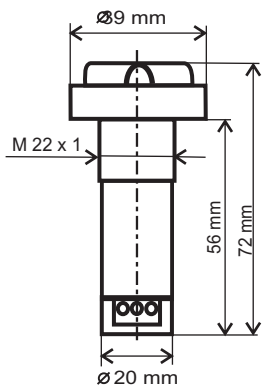

SUS-95.Q
SQUARE EXECUTION



SUS-95.L
SQUARE EXECUTION





TECHNICAL DATA:

Working voltage: 12–230 V AC, DC
Rated current: max. 20 mA
Coverage: after build-in IP65 from front side
 terminal block IP 20
Lighting: according to LED
Working temper: -25 to + 60 °C
Service life: min. 100 000 service hours
Mounting hole: 22 mm
Hole pitch: min. 40 mm
Panel thickness: max. 12 mm
Wiring method: max. 1,5 mm

NOTICE:

"L" execution can be made just in colour combination red/green.
 For voltage 110 V DC and more are signallamps equipped with an external resistor.
 Head of indicator could be manufactured in various colours, standardly is black.
 Voltage suppression is according to order.

EXAMPLE OF ORDER SPECIFICATION:

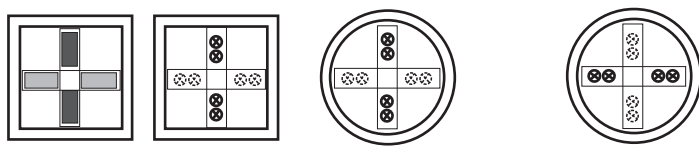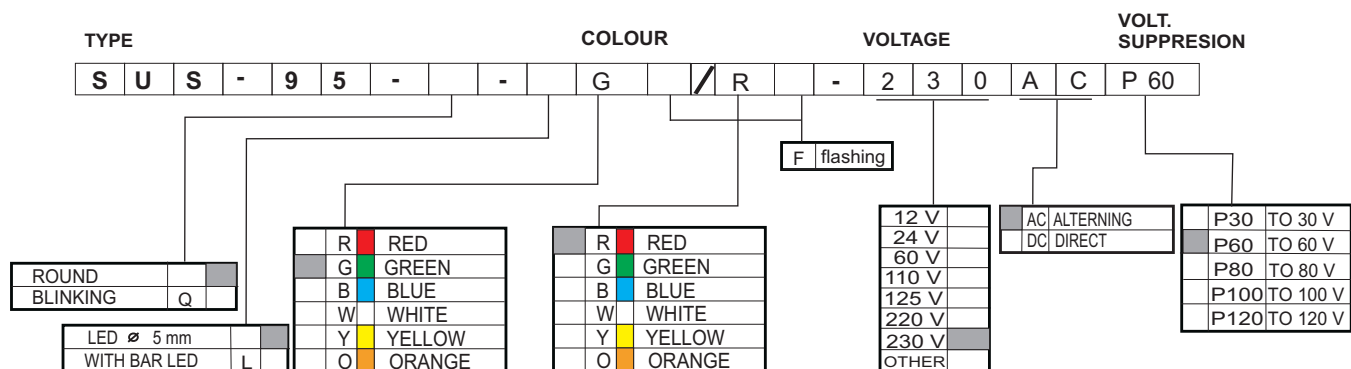

ACCESSORIES: Box spanner M22



Průmyslová 720
682 01 Vyškov
Czech republic

<http://www.eleco.cz>
e-mail: eleco@eleco.cz

Tel.: +420 517 344 344
Fax: +420 517 333 566